



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

atg airports
Micro 200 CCR
Sinusoidal Range of
Constant Current Regulators
FAA Compliant: L-828

Compliance and Applications

FAA Compliant: AC 150/5345-10F
ICAO Aerodrome Design Manual, Part 5
UK CAP 168
IEC 61822:2003
EN 61000-6-2:2005
EN 61000-6-4:2001

The Micro 200 CCR is specifically designed to provide a sinusoidal wave form power source to lighting circuits containing both LED and conventional lighting fixtures plus other electronic devices.

The Micro 200 is fitted with state-of-the-art electronics that monitor and adjust the output waveform many thousands of times per second to produce a sinuwave output. This leads to superior responses to load changes and circuit switching, improved protection against over-current or open circuit fault conditions while delivering superior power factors without compromising on a minimized harmonic content.

Features

- The Micro 200 CCR employs Pulse Width Modulation (PWM) Control of an IGBT H-bridge to produce a sinusoidal output current wave form and near unity power factor at all brilliancy levels.
- Delivers a substantial improvement in the harmonic content of the supply current.
- Uses the same cubicle footprint as previous designs, which keeps floor space requirements to a minimum.
- Micro-controlled Display allowing extensive CCR monitoring and diagnostic information to be presented to Engineers and Technicians. This can include:
 - Output Current Value
 - Brightness Step
 - % of Maximum Output
 - Alarm Text Description
 - Number of Failed Lamps
 - Hours Run Counter
 - Insulation reading
 - Power analysis



Standard Functions and Displays

- Sine Wave Output at all brilliances on resistive loads.
- Active Control to maintain performance on non-linear loads.
- Near Unity Power factor at all brilliancy levels.
- Display of true output current RMS value.
- Open Circuit Protection.
- Short Circuit Protection.
- Monitoring of Current intolerance.
- Output VA drop error.
- Dual Hours Run Counter records of runtime at maximum brilliancy and total hours run time at any brilliancy level.
- Near instantaneous reaction to current overloads during block switching operations.
- Internal/External brilliancy control.
- CCR “On”- current flowing in the series loop.
- Warning indication of “Open Circuit”, “Over Current”, and “Output Current Tolerance Fault”.
- Elapsed time hours counter at maximum brilliancy.
- Elapsed time hours counter of total hours run.
- Built-in adjustable current ramp for switch on, enhances lamp life by reducing stress on lamp filaments.
- Parameters configurable from front panel.
- Castors for easy maneuverability.
- Eye bolts for easy lifting.
- Built in 24/48V supply for control systems.
- Contained in vermin proof powder coated cabinet.

Visit our web site: www.flightlight.com



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

atg airports
Micro 200 CCR
Sinusoidal Range of
Constant Current Regulators
FAA Compliant: L-828

Optional Functions and Displays

- Display of series circuit leakage resistance value.
- Internal lightning arrestors on the outgoing circuit.
- Lamp Failure Detection – displayed as a total number of lamps failed, or as a percentage of total lamps. Accuracy ± 1 lamp for up to 10 faults and ± 3 for up to 30 lamps at all brilliancy steps.
- Earth Leakage Detection – measures the insulation resistance of the series circuit. Two stage alarm output available.
- Serial Communication Remote Control – serial communication is available through the micro-controller. It is available in two versions, single and dual and communicates with hardware using RS485 and modern protocols such as J-Bus and PROFIBUS. The dual version gives the control system enhanced redundancy up to the CCR.
- Plug-in, HV Cut Out Switch – An additional safety device can be fitted that isolates the series circuit from the CCR output. It also provides earthing facilities for the series circuit and insulation resistance measuring point.
- Circuit selector switches integral to the CCR.
- Power Monitor to display output voltage (RMS value), input power factor, input voltage, efficiency, circuit power (kW/kVA).


Design and Construction

The Micro 200 CCR is a microprocessor supervised Constant Current Regulator with the current control loop and H-bridge output and protection circuitry realized in high speed analog electronics.

Each Micro 200 CCR is in a self contained cubicle divided into four main compartments separating HV, LV and control elements.

Microcontroller and Display Compartment

This compartment comprises a PCB Sub-assembly using a microcontroller to allow parameterization of the CCR characteristics and display of monitored and alarm information. All of the electronic sub-assemblies in this section are accessible from the front of the CCR cubicle.

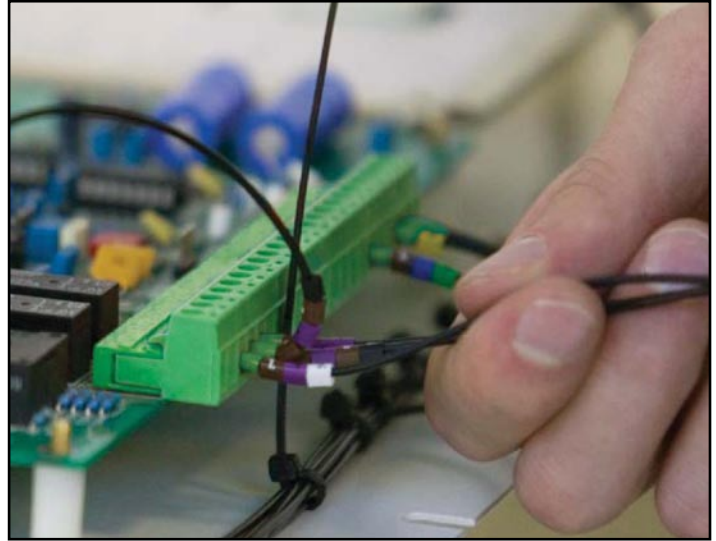

Analog Electronics

This compartment includes the main control PCB associated with the feedback controller, error amplifier, H-bridge controller, lamp failure detection and earth fault detection. In this section components are accessible from the front of the CCR cubicle.

Power

These compartments contain all the power components connected to the CCR output current loop such as the IGBT stack, H-bridge and power control card, main contactor, main transformer, feedback transformers, filters and transformer terminals. These sections are accessible from both the side and rear of the CCR cubicle.

Connection

There are 3 separate terminal compartments:

- Mains Supply Input
This compartment allows for the connection to input terminals and access to fuses, without the need to access the power compartment. It is accessible at the rear of the cubicle.
- Control Connections
- HT Output Terminal
Contains up to 7 output terminals, optional lighting arrestors and a HV cut-out switch

Visit our web site: www.flightlight.com



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

atg airports
Micro 200 CCR
Sinusoidal Range of
Constant Current Regulators
FAA Compliant: L-828

Technical Specifications

Power Factor

Close to unity at maximum brilliancy and better than 0.9 at minimum when connected to a rated load.

Efficiency

At nominal power into a resistive load, nominal voltage and maximum brilliancy.

- Better than 90%.

Output Power

- At 210, 220, 230, 240V: Outputs of 1.5, 2.5, 4.0, 5.0, 7.5 KW
- At 380, 400, 415V: Outputs of 2.5, 4.0, 5.0, 7.5, 10.0, 12, 15 KW

Output Current

- 6.0A, 6.6A, 12A

Input Voltages

- 220, 230, 240V Single Phase 50/60 Hz
- 380, 400 & 415V Single Phase, 50/60Hz
- 400 & 415C Three Phase, 50/60Hz

Remote Control

- Digital 24 or 48 VDC (8 wire and command)
- Analog
- 3 wire and command
- BCD and command
- Serial communication (optional) RS485 Protocols

Operating Environmental Conditions

- From short circuit to full load
- For nominal input voltage $\pm 10\%$
- For ambient temperatures from -40°C to $+ 50^{\circ}\text{C}$
- For altitudes up to 2000m
- For a relative humidity range of 10% RH to 95% RH
- Maximum 30% of transformers open circuit in their secondary

Protection Devices

- Protection against "Open Circuit" is activated when the output current falls below 1 amp for more than 100ms



- Protection against "Over Current" is activated when:
 - IEC settings
 - The current reaches 102.5% of nominal value for more than 5s
 - Or the current reaches 125% of nominal value for more than 300ms
 - FAA settings
 - The current reaches 105% of nominal value for more than 5s
 - Or the current reaches 125% of nominal value for more than 1s

Visit our web site: www.flightlight.com




Flight Light Inc.
 2708 47th Ave.
 Sacramento, California, U.S.A.
 95822-3806

PH (916) 394-2800
 TF (800) 806-3548

FX (916) 394-2809
 EM info@flightlight.com

atg airports
Micro 200 CCR
 Sinusoidal Range of
 Constant Current Regulators
 FAA Compliant: L-828


Front Panel

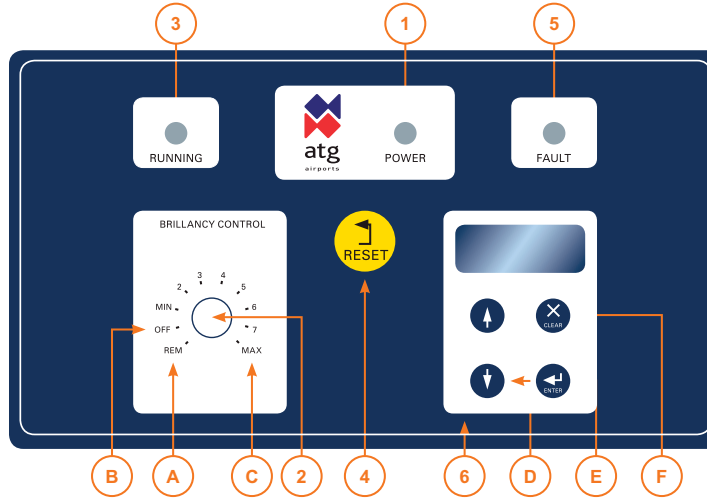

- | | | |
|---------------------------|-----------------------|---|
| 1 CCR Power 'ON' | 3 CCR "Running" | 6 Alpha - Numeric
Fault/Status Display |
| 2 Selection Rotary Switch | 4 Fault Reset Button | D Scroll Up/Down Buttons |
| A Remote Mode | 5 CCR Fault Indicator | E Enter/Accept |
| B Off | | F Cancel |
| C Brilliance Levels | | |

* Note Rotary switch notation/operation can be changed to suit clients existing systems.

Micro 200 CCR Block Diagram

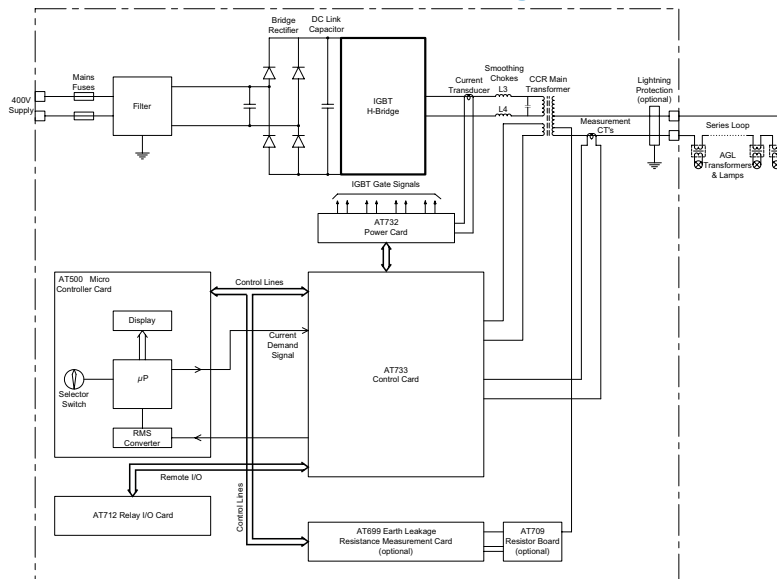

Visit our web site: www.flightlight.com



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

atg airports
Micro 200 CCR
Sinusoidal Range of
Constant Current Regulators
FAA Compliant: L-828



Suggested Specification

The Constant Current Regulator shall be microprocessor assisted using high speed IGBT technology to control the input to the main transformer to produce a sinusoidal output waveform. It shall comply with IEC 61822 and ICAO Aerodrome Design Manual Part 5, para 3.2.1.4 to 3.2.16 or FAA specs L-829/L828 in Advisory Circular AC 150/5345-10F.

The CCR should be designed for continuous indoor operation in an ambient temperature of -40°F (-40°C) to 122°F ($+50^{\circ}\text{C}$) and maximum relative humidity of 95%. It shall be cooled by natural convection.

The CCR shall have a regulation accuracy of $\pm 1\%$ of values of intensity under the following conditions:

- Load Variation between 0% and 100%
- Supply Voltage Variation $+10\%$ to 20%
- Supply Frequency Variation $\pm 5\%$
- Power Factor 0.9 efficiency greater than 0.9 at full load

The CCR will contain a series circuit transformer with multiple tappings on the secondary winding delivering variable power from the CCR output and to adjust the CCR capacity to actual load, improving the primary power factor and efficiency of the Micro 200 CCR. The

CCR should be equipped with the following features:

- Open circuit protection device
- Over current protection device
- Current monitoring and display
- Lamp failure detection (option)
- Internal lightning arrestors on the output circuit (option)
- Elapsed time recording
- Brightness control: up to 8 steps
- Adjustable operating parameters accessed via the CCR front panel
- Remote monitoring via volt free contacts
- Tolerance monitoring (difference between actual and set brilliancy level)
- Insulation resistance monitoring (option)

The CCR may also be supplied with the following optional equipment:

- Serial Communications Interface (MODBUS, JBUS, PROFIBUS)
- Series Circuit insulation resistance measurement using 500 VDC test voltage when CCR is operating or manual test at 1000 VDC
- Integral Circuit Selector Unit (2,3,4,5 or 6 way)

Visit our web site: www.flightlight.com