



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

Dual Runway Guard/Stop Bar Light
H-Series
Type: L-852GS
Honeywell

Dual Runway Guard/Stop Bar Light

Type: L-852GS

Compliant with:


FAA Advisory Circular AC150/5345-46B, Class 2, Style 3.

USE

The Honeywell Dual Runway Guard/Stop Bar Lights may be used to combine the Hold and stop bar fixtures into one fixture. This will allow for use of a hold bar for operations above 1200 feet Runway Visual Range (RVR), and a stop bar for operations below 1200 feet RVR. Prisms are non-field replaceable.

FEATURES

- Fixture rises a maximum of 0.250 inch above the surface finish.
- Light fixture is a uni-directional fixture with two (2) 105-watt halogen lamps.
- Can be used for any FAA Category I, Category II, Category III, ICAO, or Military runway guard applications.
- Light housing is made from a one-piece aluminum casting making it lightweight (14 lb).
- Mounts on a standard size L-868B base whose top surface is 0.750 inch below the surface finish.

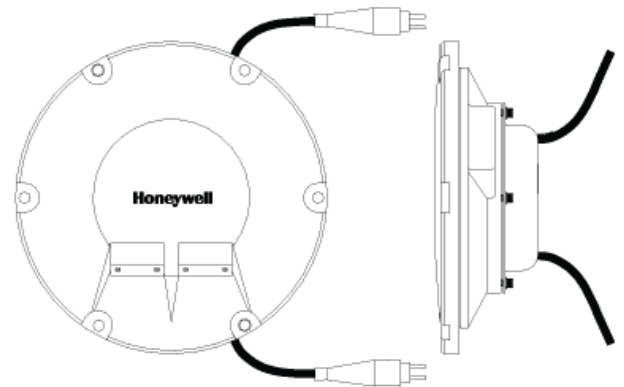

OUTLINE DRAWING

Visit our web site: www.flightlight.com




Flight Light Inc.
 2708 47th Ave.
 Sacramento, California, U.S.A.
 95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

Dual Runway Guard/Stop Bar Light
H-Series
Type: L-852GS
Honeywell

H 8 5 2 G - U E - S Z Q - 8 0 0 1

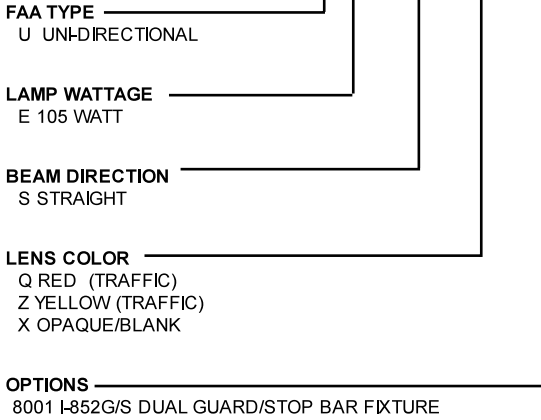

Dual Runway Guard/Stop Bar Light Part Numbers

Part No	Description
H852G-UE-SZQ-8001	Uni-directional, Yellow-Red Guard/Stop Light, 2x105 W Lamps

Dual Runway Guard/Stop Bar Light Dimensions and Shipping Information

Dimensions	Shipping
Size: 11.94 in. dia x 4.37 in. deep	Shipping Volume: 0.7 cu ft
Weight: 17 lbs	Shipping Weight: 20 lbs

For options or requirements not listed above, please contact the factory.

Dual Runway Guard/Stop Bar Light Spare Parts and Accessories

Part Number	Description
40F00105	105 W Harness Lamp
24F00120-02T	Red Filter
24F00120-04T	Yellow Filter
ET10066601	100 W 6.6/6.6 A Isolation Transformer
EK54D4D4	Primary Connector Kit No. 8
1AL33MSPLKIT	Heatshrink Tubing(Qty 1)

Dual Runway Guard/Stop Bar Light Isolation Transformer Requirements

Uni-directional	100 W, 6.6 A Secondary
-----------------	------------------------

Visit our web site: www.flightlight.com