



Flight Light Inc.  
2708 47th Ave.  
Sacramento, California, U.S.A.  
95822-3806



PH (916) 394-2800    FX (916) 394-2809  
TF (800) 806-3548    EM info@flightlight.com

**Unidirectional Runway End Identification  
Lighting System (REIL) Style: C,  
Low Intensity, Single Step, Honeywell**

# Runway End Identification Lighting System (REIL)


Model: GEA20-0712A  
Style: C, Low Intensity, Single Step

The Honeywell Runway End Identification Light System (REIL) provides a circle guidance and visual identification of the end of the runway for landing aircraft. The system consists of two flashing light assemblies.

The light fixtures are usually mounted remotely on 2-inch EMT located 40 feet to the left and right of the full strength pavement and in line with the threshold lights.

The main components of the REIL System are one (1) control cabinet, one (1) flasher power supply, two (2) flasher light heads, and miscellaneous mounting hardware. Both flashers operate simultaneously to produce a short duration burst of white light twice per second. The timer is located in the master control cabinet.

System control of the flashing light fixtures is accomplished through the master control cabinet unit for a single low intensity level of light output. The system provides for either local or remote control and is available with an optional current sensing relay and/or Honeywell series to parallel power adapters.

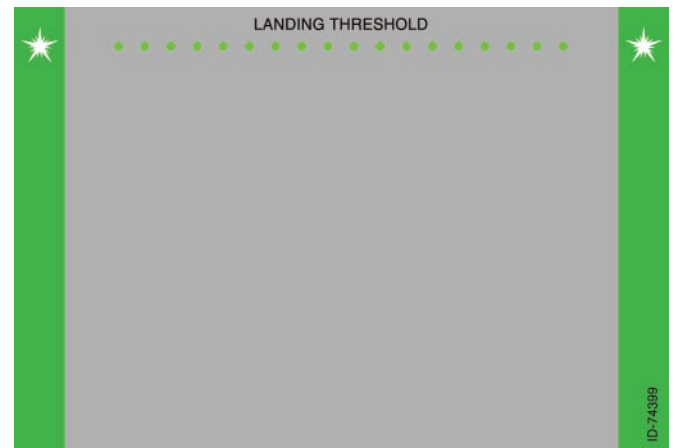

Typical REIL Layout

**Visit our web site: [www.flightlight.com](http://www.flightlight.com)**



Flight Light Inc.  
 2708 47th Ave.  
 Sacramento, California, U.S.A.  
 95822-3806



PH (916) 394-2800    FX (916) 394-2809  
 TF (800) 806-3548    EM info@flightlight.com

**Unidirectional Runway End Identification  
 Lighting System (REIL) Style: C,  
 Low Intensity, Single Step, Honeywell**

**REIL System Components - Style C**

System Components	Qty	Part Number
GEA20-0712A-System		
Control cabinet	1	GEA20603
Flasher power supply	1	GEA20602
Flash head	2	GEA20360
Wire harness	2	GEA20054-1
Floor flange	6	B1A0009SDE3
Frangible coupling	6	75-59E
Installation manual	1	BFG-M1043
Aiming Device	1	GEA80008

**REIL Optional System Components - Style C**

System Components	Qty	Part Number
-CS Current sensing relay	1	TBD
Baffle assembly	1	GEA20242
Power adapters:		
- 6.6 A	1	GEA21010
- 20 A	1	GEA21020
Transformer for Current Sensor	1	ET04566601

**REIL System Specifications - Style C**

<b>OPERATIONAL:</b>		
Sequence flashing lights	Input power	120/240 V ac, 60 Hz; single-phase, 3-wire center tap
	Current	2.4 A ac
	Power	570 Va
<b>ENVIRONMENT:</b>		
	Temperature	-55 to +55°C
	Relative humidity	0 to 95%
	Altitude	10,000 ft
<b>PHOTOMETRIC:</b>		
	Low intensity	350 to 1050 candela
<b>APPLICATIONS:</b>		
	Style: C Unidirectional	

**Visit our web site: [www.flightlight.com](http://www.flightlight.com)**