



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

**Omnidirectional
Runway End Identification
Lighting System (REIL)
Style: B,
High Intensity, Single Step
Honeywell**

Runway End Identification Lighting System (REIL)


Model: GEA20-0812A
Style: B, High Intensity, Single Step

The Honeywell Runway End Identification Light System (REIL) provides a circle guidance and visual identification of the end of the runway for landing aircraft. The system consists of two omnidirectional flashing light assemblies.

The light fixtures are usually mounted remotely on 2-inch EMT located 40 feet to the left and right of the full strength pavement and in line with the threshold lights.

The main components of the REIL System are one (1) control cabinet, one (1) flasher power supply, two (2) flasher light heads, and miscellaneous mounting hardware. Both flashers operate simultaneously to produce a short duration burst of white light twice per second. The timer is located in the master control cabinet.

System control of the flashing light fixtures is accomplished through the master control cabinet unit for a single high intensity level of light output. The system provides for either local or remote control and is available with an optional current sensing relay and/or Honeywell series to parallel power adapters.

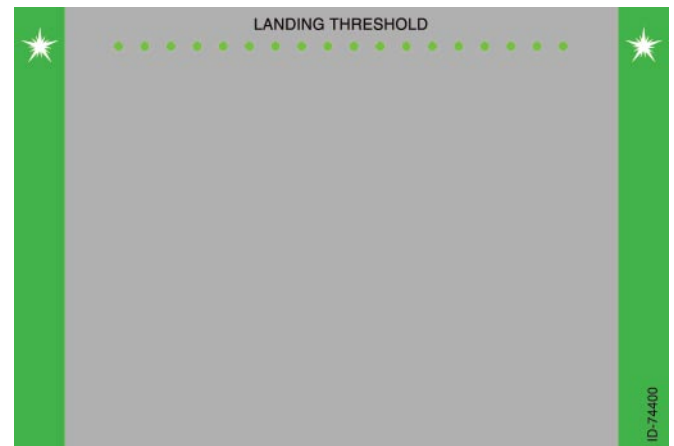

Typical REIL Layout

Visit our web site: www.flightlight.com



Flight Light Inc.
 2708 47th Ave.
 Sacramento, California, U.S.A.
 95822-3806

PH (916) 394-2800 FX (916) 394-2809
 TF (800) 806-3548 EM info@flightlight.com

**Omnidirectional
 Runway End Identification
 Lighting System (REIL)
 Style: B,
 High Intensity, Single Step
 Honeywell**

REIL System Components - Style B

System Components	Qty	Part Number
GEA20-0812A-System		
Control cabinet	1	GEA20615
Flasher power supply	1	GEA20551
Flash head	2	GEA20100-2
Floor flange	6	B1A0009SDE3
Frangible coupling	6	75-59E
Installation manual	1	GEM1042
Wire Harness	2	GEA20054-1

REIL Optional System Components - Style B

System Components	Qty	Part Number
-CS Current sensing relay	1	GE3836-0014
Power adapters:		
- 6.6 A	1	GEA21010
- 20 A	1	GEA21020
Transformer for Current Sensor	1	ET04566601

REIL System Specifications - Style B

OPERATIONAL:		
Sequence flashing lights	Input power	120/240 V ac, 60 Hz; single-phase, 3-wire center tap
	Current	4 A ac
	Power	1 k Va
ENVIRONMENT:		
	Temperature	-55 to +55°C
	Relative humidity	0 to 95%
	Altitude	10,000 ft
PHOTOMETRIC:		
	High intensity	2,500 to 7,500 candela
APPLICATIONS:		
	Style: B Omnidirectional	

Visit our web site: www.flightlight.com