



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com

Runway Threshold/End Light
H-Series
Type: L-850D
Honeywell

Runway Threshold/End Light


Type: L-850D

USE

The Honeywell Runway Threshold/End Lights are used to define the beginning of the runway pavement suitable for aircraft operation. The lights are typically used with medium and high intensity approach lighting systems utilizing displaced thresholds. Prisms are non-field replaceable.

FEATURES

- Fixture rises a maximum of 0.200 inch above the surface finish.
- Light fixture is a bi-directional fixture with four (4) 48-watt halogen lamps.
- Can be used for any FAA Category I, Category II, Category III, ICAO, or Military runway threshold/end applications.
- The light housing is made from a one-piece aluminum casting making it lightweight (14 lb).
- Mounts on a standard size L-868B base whose top surface is 0.750 inch below the surface finish.

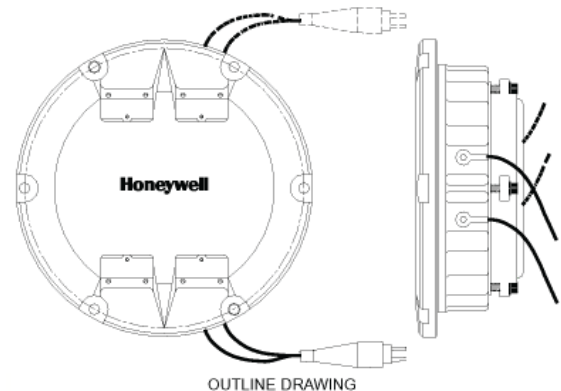

Visit our web site: www.flightlight.com



Flight Light Inc.
 2708 47th Ave.
 Sacramento, California, U.S.A.
 95822-3806

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM info@flightlight.com


Runway Threshold/End Light
H-Series
Type: L-850D
Honeywell

Runway Threshold/End Light Part Numbers

Part No	Description
H850D-BC-RGR	Bi-directional, Green-Red, Green, Right Toe, 4x48 W Lamps
H850D-BC-LGR	Bi-directional, Green-Red, Green, Left Toe, 4x48 W Lamps

Runway Threshold/End Light Dimensions and Shipping Information

Dimensions	Shipping
Size: 11.94 in. dia x 4.37 in. deep	Shipping Volume: 0.7 cu ft
Weight: 17 lbs	Shipping Weight: 20 lbs

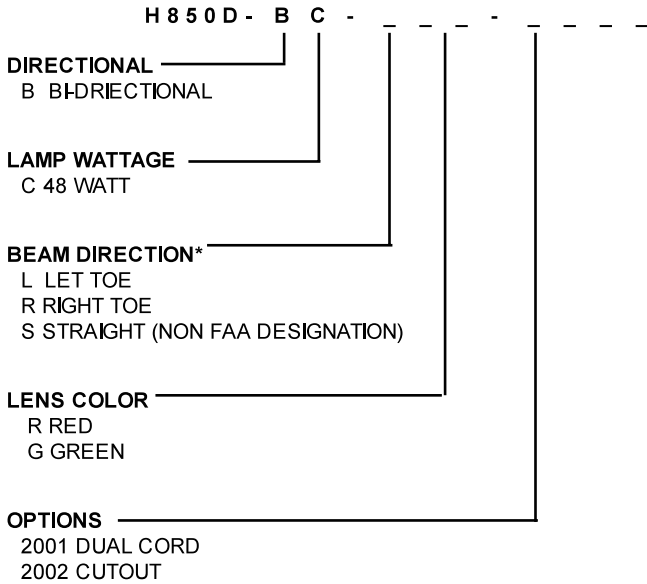

For options or requirements not listed above, please contact the factory.

* Only the threshold side is toed.

Runway Threshold/End Light Spare Parts and Accessories

Part Number	Description
LA000011	48 W Harness Lamp
40F01048	48 W Harness Lamp w/ Cutout
24F00120-05	Green Filter
24F00120-02	Red Filter
ET20066601	200 W 6.6/6.6 A Isolation Transformer
EK54D4D4	Primary Connector Kit No. 8
1AL33MSPLKIT	Heatshrink Tubing(Qty 1)

Runway Threshold/End Light Isolation Transformer Requirements

Bi-directional	200 W, 6.6 A Secondary
----------------	------------------------

Visit our web site: www.flightlight.com